


Cetyl Palmitate

Basic Information

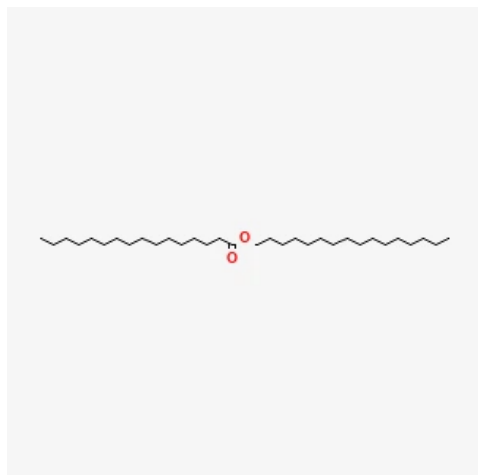

Cetyl Palmitate Structure

IUPAC Name	Hexadecyl hexadecanoate
CAS Number	540-10-3
HS Code	2915.70
Molecular Formula	C ₃₂ H ₆₄ O ₂
Structural Formula	CH ₃ (CH ₂) ₁₄ COO(CH ₂) ₁₅ CH ₃
Synonyms	Palmityl palmitate, 1-Hexadecyl palmitate, Cetyl hexadecanoate
Molecular Weight	480.84 g/mol

Description

Cetyl palmitate is a wax ester formed from cetyl alcohol (C16) and palmitic acid (C16). It occurs naturally in spermaceti wax and is now produced synthetically from palm oil-derived raw materials.

As a natural wax ester analog, cetyl palmitate closely mimics the properties of human skin lipids, making it an outstanding ingredient for skin care and cosmetic formulations. It provides emolliency, gloss, and a smooth skin feel without greasiness. It is also used as a structuring agent and viscosity modifier in lipsticks, balms, creams, and other solid or semi-solid cosmetic preparations.

Chemical and Physical Properties

Physical Description	White to off-white waxy solid or flakes.
Color / Form	White to off-white.
Odor	Practically odorless.
Taste	Bland.
Boiling Point	Approx. 460 °C (estimated)
Melting Point	53–55 °C
Flash Point	~220 °C
Solubility	Insoluble in water; soluble in hot ethanol, chloroform, and oils.
Density	Approx. 0.85 g/cm ³ (liquid)
Vapor Density	Greater than air.
Vapor Pressure	Negligible at ambient temperature.
Stability / Shelf Life	Highly stable; resistant to hydrolysis and oxidation under normal conditions.
Viscosity	Solid at room temperature.
Heat of Combustion	Approx. ?20,200 kJ/mol (estimated).
Polymerization	No hazardous polymerization.

Ionization Potential **No data available.**

Uses and Manufacturing

Uses

Cetyl palmitate is widely used in the cosmetic and personal care industry as a natural wax ester emollient and texture agent. In lipsticks, lip balms, and lip glosses, it provides a smooth, glossy finish, improves adhesion, and ensures a comfortable waxy texture. In skin creams, face powders, foundations, and pressed powders, it acts as a binding and texturizing agent. Because cetyl palmitate closely mimics jojoba wax and spermaceti in its molecular structure, it is frequently used as a sustainable replacement for both materials in premium skin care formulations. It imparts a smooth, non-greasy feel and helps reduce the tackiness of wax-based formulations.

Industrial uses include its application as a lubricant and release agent in polymer processing, a component of specialty waxes for polishes, coatings, and candles, and as a processing aid in rubber and plastics manufacturing.

Methods of Manufacturing

Cetyl palmitate is produced by direct esterification of cetyl alcohol with palmitic acid in the presence of an acid catalyst (e.g., sulfuric acid or p-toluenesulfonic acid) at temperatures of 180–220 °C with continuous removal of water, or via enzymatic esterification using immobilized lipase (e.g., *Candida antarctica* lipase B).

In industrial practice, the reaction is typically performed under reduced pressure to facilitate water removal and improve yields. The crude product is then purified by filtration, washing with alkali solution to remove traces of acid, and distillation or crystallization to achieve target purity and color specifications. Quality is characterized by GC purity, acid value, saponification value, color (APHA), and melting range.

Hazard Identification

Hazard Summary

Low toxicity. Not classified as hazardous. May cause mild irritation on prolonged contact.

Fire Hazard

Combustible. Dust or molten material may pose fire hazard.

Skin, Eye & Respiratory Irritations

Non-irritating to skin under normal conditions. May cause mild eye irritation.

Safety and First Aid

Physical Dangers

Combustible solid; molten material is combustible.

Skin First Aid

Wash with soap and water.

Eye First Aid

Rinse with clean water.

Ingestion First Aid

Generally considered non-toxic. Seek medical advice if large amounts are ingested.

Fire Fighting Procedures

Use dry chemical, foam, or CO₂. Avoid water jet on molten material.

Handling and Storage

Nonfire Spill Response

Small spill: Sweep or vacuum up solid material. For molten spills, allow to cool and solidify before collection. Place collected material in labeled waste containers.

Large spill: Prevent entry into drains and waterways. Collect solidified material mechanically. Residual surface contamination can be cleaned with hot detergent solution.

Safe Storage

Store in tightly closed containers in a cool, dry, well-ventilated area. Protect from heat, moisture, and direct sunlight. Keep away from oxidizing agents. Store away from food and animal feed. Avoid elevated temperatures which may cause melting and container deformation.

Storage Conditions

Recommended storage temperature: 15–25 °C in solid/flake form; 60–65 °C if stored as melt. Shelf life: 24–36 months in original sealed packaging. Suitable containers: HDPE bags, drums, or stainless steel tanks (for melt). Protect from moisture and prolonged heat exposure.