


# Cetyl Stearyl Alcohol

## Basic Information

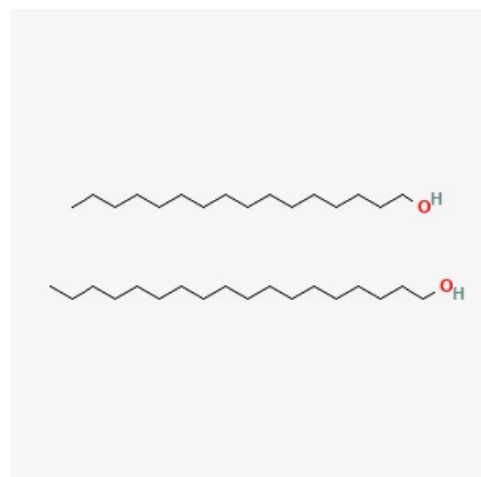

*Cetyl Stearyl Alcohol Structure*

IUPAC Name	Hexadecan-1-ol / Octadecan-1-ol mixture
CAS Number	67762-27-0
HS Code	2905.17
Molecular Formula	C <sub>16</sub> H <sub>34</sub> O / C <sub>18</sub> H <sub>38</sub> O
Structural Formula	CH <sub>3</sub> (CH <sub>2</sub> ) <sub>14</sub> CH <sub>2</sub> OH / CH <sub>3</sub> (CH <sub>2</sub> ) <sub>16</sub> CH <sub>2</sub> OH
Synonyms	Cetostearyl alcohol, Cetearyl alcohol, C16-C18 fatty alcohol blend
Molecular Weight	242.44 / 270.50 g/mol

## Description

Cetyl stearyl alcohol (cetearyl alcohol) is a mixture of cetyl alcohol (C16) and stearyl alcohol (C18), two long-chain fatty alcohols. It is a white, waxy solid that is widely used in cosmetic, pharmaceutical, and personal care industries. This mixture exhibits excellent emulsification and emollient properties, making it one of the most commonly used co-emulsifiers and stabilizers in o/w and w/o emulsions. It helps create stable, smooth-textured creams and lotions. Commercially, cetyl stearyl alcohol is produced from the reduction of corresponding fatty acids derived from palm or coconut oil.

## Chemical and Physical Properties

Physical Description	White to off-white waxy solid, pellets, or flakes.
Color / Form	White.
Odor	Faint, characteristic odor.
Taste	Bland, slightly waxy.
Boiling Point	~330–345 °C
Melting Point	48–56 °C
Flash Point	~185 °C
Solubility	Practically insoluble in water; soluble in hot ethanol, ether, and most oils.
Density	Approx. 0.81–0.84 g/cm <sup>3</sup>
Vapor Density	Greater than air.
Vapor Pressure	Negligible at ambient temperature.
Stability / Shelf Life	Stable under normal conditions. Resistant to oxidation.
Viscosity	Solid at room temperature; low viscosity when melted.
Heat of Combustion	Approx. ?10,160 to ?11,375 kJ/mol (weighted average for C16/C18 blend).
Polymerization	No hazardous polymerization.

Ionization Potential      **No data available.**

## Uses and Manufacturing

### Uses

Cetyl stearyl alcohol is a primary co-emulsifier and emollient in the formulation of creams, lotions, skin care products, and hair conditioners. It forms a lamellar liquid crystalline phase in combination with emulsifiers such as cetareth-20, providing excellent emulsion stability, a rich texture, and enhanced moisturization by occlusively locking moisture into the skin.

In hair care products, cetethyl alcohol is a key ingredient in conditioners and treatments, where it deposits on the hair to improve softness, reduce tangling, and impart shine. It is also used in hair bleaching creams and permanent wave formulations.

Pharmaceutical applications include use as an excipient in topical creams and ointments. Cetethyl alcohol is listed in the USP, Ph.Eur., and BP as an approved excipient under the name "Cetostethyl Alcohol." It is a component of cetomacrogol emulsifying wax and other approved emulsifying bases.

Industrial applications include use in polish formulations, surfactant production (ethoxylation to produce cetareth-n non-ionic surfactants), and as a processing aid in rubber and plastic compounding.

### Methods of Manufacturing

Cetyl stearyl alcohol is produced by catalytic hydrogenation of fatty acid methyl esters derived from palm oil or coconut oil using copper chromite or copper-zinc oxide catalysts at elevated temperature and pressure. The hydrogenation converts the ester groups to hydroxyl groups, yielding the corresponding fatty alcohol.

Fractional distillation of the crude fatty alcohol product yields different cuts with varying C16:C18 ratios. Typical commercial cetethyl alcohol contains approximately 30% cetyl alcohol (C16) and 70% stearyl alcohol (C18), though other ratios are also available. Quality is controlled by GC purity analysis, melting range, acid value, hydroxyl value, iodine value, and color (APHA).

## Hazard Identification

### Hazard Summary

Low acute toxicity. Generally regarded as safe for cosmetic use. May cause mild irritation on prolonged skin or eye contact.

### Fire Hazard

Combustible solid. Dust may form explosive mixtures in air.

### Skin, Eye & Respiratory Irritations

Mild skin and eye irritation possible on prolonged or repeated contact.

## Safety and First Aid

### Physical Dangers

Combustible solid; dust may form explosive mixtures.

### Skin First Aid

Wash with soap and water.

### Eye First Aid

Rinse eyes with water for several minutes.

### Ingestion First Aid

Not considered significantly toxic. Seek medical advice if large amounts ingested.

### **Fire Fighting Procedures**

Use CO<sub>2</sub>, foam, or dry chemical. Water may be used to cool surrounding structures.

## **Handling and Storage**

### **Nonfire Spill Response**

Small spill: Sweep or vacuum up. Avoid generating dust. Collect in closed containers for disposal. For molten spill, allow to solidify before collection. Warn of slip hazard on solidification.

Large spill: Contain spill. Prevent entry into drains. Collect mechanically after solidification. Clean residual with hot water and detergent.

### **Safe Storage**

Store in original, well-sealed containers in a cool, dry, ventilated area. Keep away from heat, ignition sources, and strong oxidizing agents. Moisture should be avoided to prevent product degradation. Bulk melt storage tanks should be maintained at 55–65 °C and fitted with inert gas blankets.

### **Storage Conditions**

Recommended storage temperature: 15–30 °C (solid). Melt storage: 55–65 °C. Shelf life: 24 months in sealed packaging. Suitable containers: HDPE drums/bags, stainless steel tanks. Avoid PVC containers for melt storage. Store in a dry warehouse; protect from moisture.