


# Lauryl Myristyl Alcohol

## Basic Information

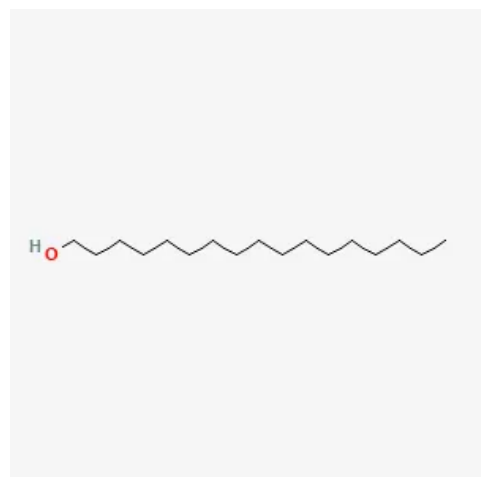

IUPAC Name	Dodecan-1-ol / Tetradecan-1-ol mixture
CAS Number	67762-41-8
HS Code	2905.17
Molecular Formula	C <sub>12</sub> H <sub>26</sub> O / C <sub>14</sub> H <sub>30</sub> O
Structural Formula	CH <sub>3</sub> (CH <sub>2</sub> ) <sub>10</sub> CH <sub>2</sub> OH / CH <sub>3</sub> (CH <sub>2</sub> ) <sub>12</sub> CH <sub>2</sub> OH
Synonyms	C <sub>12</sub> -C <sub>14</sub> fatty alcohol, Lauromyristyl alcohol, C <sub>12</sub> /C <sub>14</sub> alcohol blend
Molecular Weight	186.33 / 214.39 g/mol

Lauryl Myristyl Alcohol Structure

## Description

Lauryl myristyl alcohol is a blend of two saturated fatty alcohols: lauryl alcohol (C<sub>12</sub>, dodecanol) and myristyl alcohol (C<sub>14</sub>, tetradecanol). This mixed fatty alcohol offers a combination of properties suited to various industrial and personal care applications.

The C<sub>12</sub>/C<sub>14</sub> blend is valued in the production of anionic surfactants, particularly SLES and SLS variants with mixed chain lengths. In personal care formulations, it contributes emollient, thickening, and stabilizing properties.

This blend is also used in the manufacture of ethoxylated fatty alcohols, which serve as non-ionic surfactants and emulsifiers in cosmetics, household cleaners, and industrial applications.

## Chemical and Physical Properties

Physical Description	White waxy solid to off-white flakes at room temperature.
Color / Form	White to off-white.
Odor	Faint, characteristic fatty odor.
Taste	Bland.
Boiling Point	260–295 °C
Melting Point	24–38 °C (varies with C <sub>12</sub> :C <sub>14</sub> ratio)
Flash Point	~140 °C
Solubility	Insoluble in water; soluble in oils and organic solvents.
Density	Approx. 0.83 g/cm <sup>3</sup>
Vapor Density	Greater than air.
Vapor Pressure	Low at ambient temperature.
Stability / Shelf Life	Stable under normal storage conditions.
Viscosity	Low viscosity when liquid (above melting point).
Heat of Combustion	Approx. 77,450 to 78,670 kJ/mol (weighted average).

Polymerization	<b>No hazardous polymerization.</b>
Ionization Potential	<b>No data available.</b>

## Uses and Manufacturing

### Uses

Lauryl myristyl alcohol (C12–C14 fatty alcohol blend) is a versatile oleochemical intermediate with major uses in surfactant production and personal care formulations. In the surfactant industry, C12–C14 fatty alcohols are the preferred feedstocks for the production of sodium lauryl ether sulfate (SLES) with 2–3 EO units, a key cleansing surfactant in personal care and household cleaning products. The mixed C12/C14 chain length distribution typically gives better foaming performance and stability than pure C12 or C14 alone.

Ethoxylation of lauryl myristyl alcohol produces C12–C14 AEO (alcohol ethoxylates), which are important non-ionic surfactants used in laundry detergents, dish care products, agricultural emulsifiers, and industrial cleaners. The degree of ethoxylation (2–7 EO) determines the HLB value and performance profile of the resulting ethoxylate.

In personal care formulations, the C12/C14 fatty alcohol blend contributes emollient and thickening properties to creams and conditioners. When combined with emulsifying waxes, it forms stable o/w and w/o emulsions with rich textures.

Industrial uses include application as a metalworking lubricant additive, textile processing agent, paper softener, and antistatic agent in plastic processing.

### Methods of Manufacturing

Lauryl myristyl alcohol is produced by catalytic hydrogenation of the C12–C14 fatty acid fraction (or methyl ester fraction) derived from coconut oil or palm kernel oil. The hydrogenation is carried out using copper chromite or copper-zinc catalyst under high-pressure hydrogen (200–300 bar) at elevated temperature.

The C12/C14 ratio in the product is determined by the fatty acid composition of the raw material oil and by fractionation. Palm kernel oil typically yields a higher C12/C14 ratio (approximately 70:30 C12:C14) consistent with its natural fatty acid profile.

The product is purified by distillation and characterized by hydroxyl value, iodine value, acid value, GC composition, color, and moisture.

## Hazard Identification

### Hazard Summary

Low toxicity. May cause mild skin and eye irritation on direct contact.

### Fire Hazard

Combustible solid or liquid depending on temperature.

### Skin, Eye & Respiratory Irritations

Mild irritant to skin and eyes.

## Safety and First Aid

### Physical Dangers

Combustible solid/liquid.

### Skin First Aid

Wash with soap and water.

**Eye First Aid**

Rinse with water for 15 minutes.

**Ingestion First Aid**

Seek medical advice.

**Fire Fighting Procedures**

Use CO<sub>2</sub>, foam, or dry chemical.

**Handling and Storage****Nonfire Spill Response**

Small spill: Absorb liquid or sweep solid. Collect in labeled containers. Prevent entry into drains. Warn of slip hazard if liquid.

Large spill: Contain spill. Pump liquid into recovery containers or allow solid to cool. Do not allow entry into waterways.

Dispose according to regulations.

**Safe Storage**

Store in original, tightly sealed containers in a cool, dry, ventilated area. Keep away from heat, flames, and oxidizing agents. Grounding and bonding required during transfer. For melt storage, maintain at 40–50 °C in heated stainless steel or HDPE tanks.

**Storage Conditions**

Recommended storage temperature: 25–35 °C (liquid); 15–25 °C (solid). Shelf life: 24 months in original sealed containers.

Suitable containers: stainless steel 304/316, HDPE drums, mild steel tanks (lined). Nitrogen blanket recommended for bulk melt storage. Protect from moisture and light.